



Bobcat®

T300

Compact Loaders



Machine Rating

Rated operating capacity	1461 kg
Tipping load	4177 kg
Pump capacity – T300	80.2 l/min
Pump capacity – T300H	151 l/min
System relief at Quick Couplers	22.4–23.1 MPa
Max. travel speed	10.6 km/h

Engine

Make / Model	Kubota / V3800-DI-T-E3
Fuel / Cooling	Diesel / Liquid
Power	58 kW
Torque at 1500 RPM (SAE J1 995 Gross)	298 Nm
Number of cylinders	4
Displacement	3769 cm ³
Fuel tank capacity	113.5 l

Weights

Operating weight, T300	4401 kg
Operating weight, T300H	4421 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

Standard Features


Adjustable suspension seat	Operating lights, front and rear
Automatically activated air intake heater	Parking brake
Bob-Tach™ frame	Seat belt
Bobcat Interlock Control System (BICS)	Seat bar
Deluxe operator cab	Spark arrestor muffler
Includes interior cab foam, top and rear windows, cab door with sensor	Turbo-charger with approved spark arrestor
Front door w/ windshield wiper	Tracks — rubber — 450 mm — C-pattern
Instrumentation	CE certification
Lift arm support	

* Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) – meets requirements of SAE-J1043 and ISO 3449, Level I

Options

Deluxe instrument panel	Advanced Control System (ACS)
Power Bob-Tach™	Advanced Hand Controls (AHC)
Cab enclosure with heat	Selectable Joystick Controls (SJC)
High-flow auxiliary hydraulics	Roller suspension
Air conditioning	

Dimensions

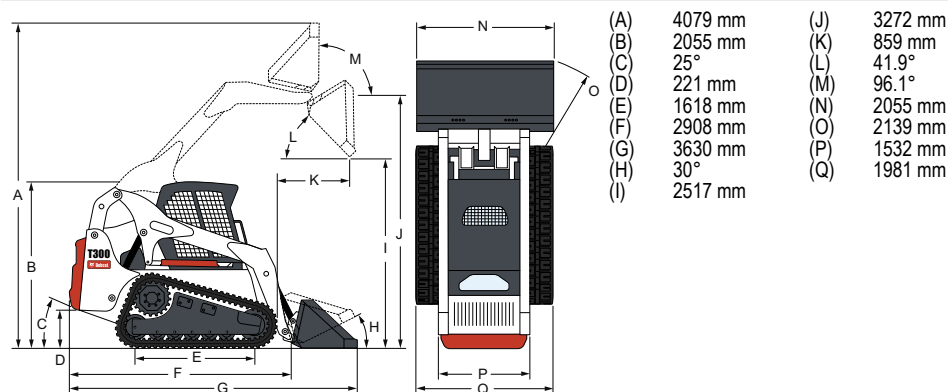

Attachments

- Angle broom*†
- Auger
- Backhoe
- Box blade
- Brushcut rotary cutter
- Buckets
- Chipper*
- Combination bucket
- Concrete pump*
- Cutter crusher*
- Dozer blade*
- Dumping hopper
- HD80 disc
- Hydraulic breaker**
- Industrial grapple
- Landplane
- Landscape rake
- Mixing bucket*
- Pallet fork – heavy duty
- Planer*
- Rear stabiliser
- Snow V-blade
- Snow blower*
- Sod layer*
- Soil conditioner*
- Spreader
- Stump grinder*
- Super scraper
- Sweeper
- Tree transplanter*
- Trench compactor
- Trencher
- Utility forks
- Utility frame
- Vibratory roller
- Water kit
- Wheel saw

*Attachment control kit required.

**When operating the loader with this attachment, a Special Applications Kit, which includes a 12 mm Lexan front door with 6 mm top and rear windows, must be used.

†Optional water kit.



www.bobcat.eu