



Bobcat®

T320

Compact Loaders



Machine Rating

Rated operating capacity	1461 kg
Tipping load	4177 kg
Pump capacity – T320	80.2 l/min
Pump capacity – T320H	140.1 l/min
System relief at Quick Couplers – T320	22.4–23.1 MPa
System relief at Quick Couplers – T320H	24.6–25.3 MPa
Travel speed	10.6 km/h

Engine

Make / Model	Kubota / V3800-DI-T-BOBCAT
Fuel / Cooling	Diesel / Liquid
Power	67.6 kW
Torque at 1600 RPM ((ISO9249 EEC)	310.3 Nm
Number of cylinders	4
Displacement	3769 cm ³
Fuel tank capacity	98.4 l

Weights

Operating weight, T320	4401 kg
Operating weight, T320H	4421 kg

Controls

Vehicle steering	Direction and speed controlled by two hand levers
Loader hydraulics tilt and lift	Separate foot pedals or optional Advanced Control System (ACS), Advanced Hand Controls (AHC) or Selectable Joystick Controls (SJC)
Front auxiliary (standard)	Electrical switch on right-hand steering lever

Drive System

Transmission	Infinitely variable tandem hydrostatic piston pumps, driving two fully reversing hydrostatic motors
--------------	---

Standard Features


Adjustable suspension seat	Operating lights, front and rear
Automatically activated air intake heater	Parking brake
Bob-Tach™ frame	Seat belt
Bobcat Interlock Control System (BICS)	Seat bar
Deluxe operator cab	Spark arrestor muffler
Includes interior cab foam, top and rear windows, cab door with sensor	Turbo-charger with approved spark arrestor
Front door w/ windshield wiper	Tracks — rubber — 450 mm — C-pattern
Instrumentation	CE certification
Lift arm support	

* Roll Over Protective Structure (ROPS) – meets requirements of SAE-J1040 and ISO 3471; Falling Object Protective Structure (FOPS) - meets requirements of SAE-J1043 and ISO 3449, Level I

Options

Deluxe instrument panel	Air conditioning
Power Bob-Tach™	Advanced Control System (ACS)
Cab enclosure with heat	Advanced Hand Controls (AHC)
High-flow auxiliary hydraulics	Selectable Joystick Controls (SJC)

Dimensions

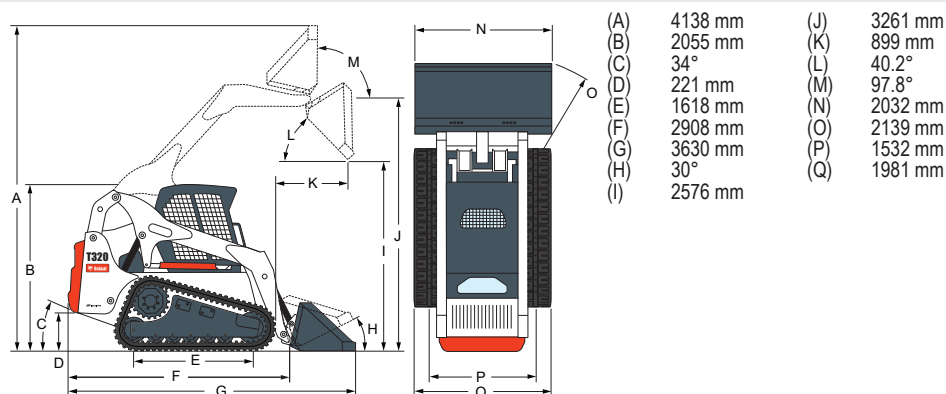

Attachments

Angle broom*†
Auger
Backhoe
Box blade
Brushcat rotary cutter
Buckets
Chipper*
Combination bucket
Concrete pump*
Cutter crusher*
Dozer blade*
Dumping hopper
Hydraulic breaker**
Industrial grapple
Landplane
Landscape rake
Mixing bucket*
Pallet fork – heavy duty
Planer*
Rear stabiliser
Snow V-blade
Snow blower*
Sod layer*
Soil conditioner*
Spreader
Stump grinder*
Super scraper
Sweeper
Tree transplanter*
Trench compactor
Trencher
Utility forks
Utility frame
Vibratory roller
Water kit
Wheel saw

*Attachment control kit required.
 **When operating the loader with this attachment, a Special Applications Kit, which includes a 12 mm Lexan front door with 6 mm top and rear windows, must be used.
 †Optional water kit.

Specifications and design are subject to change without notice - Pictures of Bobcat units may show other than standard equipment.

www.bobcat.eu



Bobcat®

